

Rimax Ceramic Beads

- Features a high breakage resistance
- Durable and cost effective

TYPICAL CHEMICAL ANALYSIS

ZrO ₂	58 %
SiO ₂	37 %
Others	5 %

AVAILABLE SIZES

0.8 - 1.0 mm
1.0 - 1.2 mm
1.2 - 1.4 mm
1.4 - 1.6 mm
1.6 - 1.8 mm
1.8 - 2.0 mm
2.0 - 2.2 mm
2.2 - 2.4 mm
2.4 - 2.6 mm
2.5 - 2.8 mm

CRYSTAL STRUCTURE

Zirconium silicate	88 %
Vitreous phase	12 %


PHYSICAL PROPERTIES

Specific gravity	4 g/cm ³
Bulk density	2.4 kg/l
Hardness Vickers	800 HV1

SAFETY DATA SHEET _____ Available

PACKAGING

25 kg plastic container

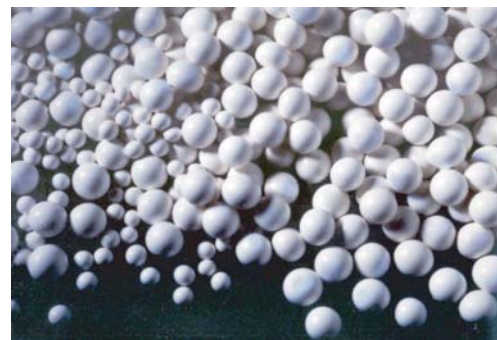

MAIN MICROGRINDING APPLICATIONS

- Paints
- Inks
- Agrochemicals
- Magnetic coatings
- Dyes
- Pigments
- Minerals
- Ceramics

SEPR
ZirPro Department
B.P. 25 - 84131 Le Pontet Cedex
France

Tel.: +33 (0)4 90 39 99 14
Fax: +33 (0)4 90 39 99 98
e-mail : zirpro@saint-gobain.com

<http://www.zirpro.com>

