

## バーシロン SE-200 不活性チューブ【参考資料】

### 概要

**特徴：**耐薬品性、透明性、柔軟性、ケミカルトランスファー、食品飲料

**適合規格：**FDA (食品)

**材質：**内層：フッ素樹脂 (FEP)、外層：ポリ塩化ビニル系

**最高使用温度：**74℃

**詳細：**詳しくは英語版データシートをご参照ください（2ページ目以降参照）

### 日本での取り扱いサイズ

品番	内径		外径		片肉厚		巻長さ
	mm	(inch)	mm	(inch)	mm	(inch)	m
AJD00002	1.59	(1/16)	3.18	(1/8)	0.79	(1/32)	15
AJD00007	3.18	(1/8)	6.35	(1/4)	1.59	(1/16)	15
AJD00012	4.76	(3/16)	7.94	(5/16)	1.59	(1/16)	15
AJD00017	6.35	(1/4)	9.52	(3/8)	1.59	(1/16)	15
AJD00028	9.52	(3/8)	14.29	(9/16)	2.38	(3/32)	15
AJD00038	12.70	(1/2)	19.05	(3/4)	3.18	(1/8)	15
AJD00053	19.05	(3/4)	25.40	(1)	3.18	(1/8)	15
AJD00816	2.0		4.0		1.0		15
AJD001292	3.0		6.0		1.5		15
AJD001533	5.0		8.0		1.5		15
AJD001382	7.0		10.0		1.5		15

製品の仕様、梱包、その他ここに記載されている事項についてはお客様へ事前の断りなく変更することがあります。(2019年8月26日現在)

サンゴバン株式会社 機能樹脂事業部

ライフサイエンス カスタマーサービス

〒391-0106 長野県諏訪郡原村10801-5

TEL: 0266-79-6410 FAX: 0266-70-1002

E-mail: [ls-japan@saint-gobain.com](mailto:ls-japan@saint-gobain.com)

[www.saint-gobain.co.jp/plastics](http://www.saint-gobain.co.jp/plastics)





# Versilon™ SE-200

## Phthalate-free Chemical Inert Transfer Tubing

### Description

Versilon™ SE-200 from Saint-Gobain Process Systems is now phthalate-free. Saint-Gobain is proud to be among the first companies to offer sustainable flexible tubing products. Versilon™ SE-200 combines the high performance standards customers demand with an eco-friendly tubing design.

### Excellent Chemical Resistance

Offering flexibility, glass-like clarity and outstanding bend radius, Versilon™ SE-200 can handle many applications where flexible tubing of the past could not be used. Its FEP inner liner provides the ultimate in chemical resistance and can accommodate a wide variety of fluids, from corrosives to MEK-based solvents. The inert liner limits the potential of fluid contamination during transfer. Versilon™ SE-200 will not impart odor or taste, making it well-suited for food and beverage use.

### Meets FDA Criteria for Food Contact

Non-toxic, taste-free and odor-free, Versilon™ SE-200 meets FDA 21 CFR Part 177.1550 criteria for contact with food products.



### Features and Benefits

- Crystal clarity
- Improved flexibility when compared to rigid fluoropolymer tubing
- Chemically resistant and inert
- Non-contaminating fluid path
- Meets FDA 21 CFR Part 177.1550 criteria for food contact
- Contains no BPA or phthalates

### Typical Applications

- Chemical processing
- Paint and solvent production and packaging
- Adhesive transfer lines
- Semiconductor processing
- Photographic processing equipment
- Beverage dispensing
- Ink and toner feed lines
- Fertilizer and pesticide distribution

## Versilon™ SE-200

Part Number	ID	OD	Wall Thickness	Min. Bend Radius	Max. Working Pressure	
	(in)	(in)	(in)	(in)	73°F (psi)*	160°F (psi)*
AJD00002	1/16	1/8	1/32	1/2	100	45
AJD00007	1/8	1/4	1/16	1	85	40
AJD00012	3/16	5/16	1/16	1-1/2	75	38
AJD00017	1/4	3/8	1/16	2	55	35
AJD00028	3/8	9/16	3/32	3-1/2	50	25
AJD00038	1/2	3/4	1/8	4	45	18
AJD00053	3/4	1	1/8	4-1/2	30	12

\*Working pressures are calculated at a 1:5 ratio relative to burst pressure using ASTM D1599.

## Typical Physical Properties

Property	ASTM Method	Value or Rating
Durometer Hardness (Shore A), 15 sec	D2240	66
Color	—	Clear
Opacity	—	Translucent
Tensile Strength, psi (MPa)	D412	2200 (15.2)
Ultimate Elongation, %	D412	390
Tear Resistance, lb-f/in (kN/m)	D1004	250 (43.8)
Specific Gravity	D792	1.21
Water Absorption, % at 73°F (23°C) for 24 hrs.	D570	< 0.01
Compression Set Constant Deflection, % at 158°F (70°C) for 22 hrs.	D395 Method B	59
Maximum Recommended Operating Temp., °F (°C)	—	165 (74)
Brittleness by Impact Temp., °F (°C)	D746	-32 (-36)
Tensile Stress, psi (MPa) @ 200% Elongation	D412	1378 (9.5)
Tensile Set, %	D412	57

Unless otherwise noted, all tests were conducted at room temperature (73°F). Values shown were determined on 0.075" thick extruded strip or 0.075" thick molded ASTM plaques or molded ASTM durometer buttons.


The values listed for working and burst pressures are derived from tests conducted under controlled laboratory conditions. Many factors will reduce the tubing's ability to withstand pressure, including temperature, chemical attack, stress, pulsation and the attachment to fittings. It is imperative that the user conduct tests simulating the conditions of the application prior to specifying the tubing for use.

## Fittings for Versilon™ SE-200 Tubing

Single barb insert fitting is recommended for use with Versilon™ SE-200 tubing.

Single barb insert fittings have a land behind the barb that allows a clamp to be fastened over the tubing (see picture below). Note: please be sure not to over-tighten the clamp as it might result in damage to the tubing.

To facilitate entry of the fitting into the tubing, the outside diameter at the end of the tapered fitting must be smaller than the inside diameter.

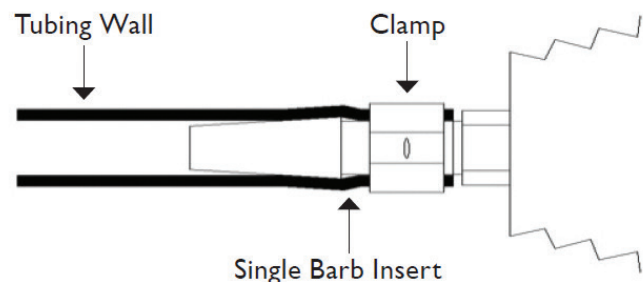

### Saint-Gobain Performance Plastics

210 Harmony Road  
Mickleton, NJ 08056  
1-800-543-8823  
Tel: (856) 423-6630  
Fax: (856) 423-8182

www.processsystems.saint-gobain.com

**NOTE:** The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Versilon™ is a trademark of Saint-Gobain Performance Plastics.